

## PORTABLE ACCELEROMETER CALIBRATION WORKSTATION



The Portable Accelerometer Calibration System, Model K9145D10, features accurate back-to-back comparison calibration of accelerometers in accordance with ISO 16063-21 (2003). A derivative of the industry-leading 9155 Accelerometer Calibration Workstation and based on a laptop PC system with a state-of-the-art 24-bit USB dynamic signal analyzer module, the K9145D10 offers a portable, turnkey calibration solution suitable for both laboratory and field portability.

The K9145D10 system supports a variety of accelerometer and velocity transducer types, including ICP® (IEPE), charge piezoelectric and voltage mode transducers. Other common accelerometers, such as piezoresistive and capacitive, can be supported by including additional signal conditioning. The included 9110D Portable Vibration Calibrator provides best-in-class rugged portability and offers simple, elegant usability as a standalone unit for in-situ calibrations.

All system components are selected for optimal portable performance within a secondary calibration system, starting with the industry's most proven reliable portable vibration calibration system shaker, the 9110D, and precision quartz ICP® reference accelerometer. Additional components included with the portable system are a Windows® laptop controller with software, system verification accelerometer, common transducer cabling and a variety of mounting accessories.

### BENEFITS:

- Portable system suitable for both field calibrations and laboratory calibrations
- Traceable calibrations to NIST and PTB
- High efficiency operation, calibrations typically performed in less than 5 minutes per axis including setup time
- Includes on-site installation and training
- Conforms to the strict requirements of ISO 16063-21 (2003) and ISO 17025 (2005)
- Entry-level solution for laboratories with a moderate number of sensors
- Model 9110D may be used separately for in-situ calibrations
- Calibrates both accelerometers and velocity sensors




## FLEXIBLE AND SIMPLE SOFTWARE SOLUTION

As a crucial part of the Model K9145D10 Accelerometer Calibration Workstation, the Windows 7® and Windows 8® compatible control software has been designed to provide accurate calibrations and an easy-to-use graphical user interface, based on the 40+ years of accelerometer manufacturing experience and more than 1,000,000 calibrations performed at PCB Piezotronics.

## FEATURES:

- Simple intuitive user interface
- Fully customizable calibration certificate through Microsoft Excel®
- Open SQL database for storing test parameters and calibration results
- Calibrates at up to 200 user-defined frequencies
- Reports calibration data in English or Metric units
- Include phase measurement for modal applications
- Control sweeps with constant acceleration or constant velocity

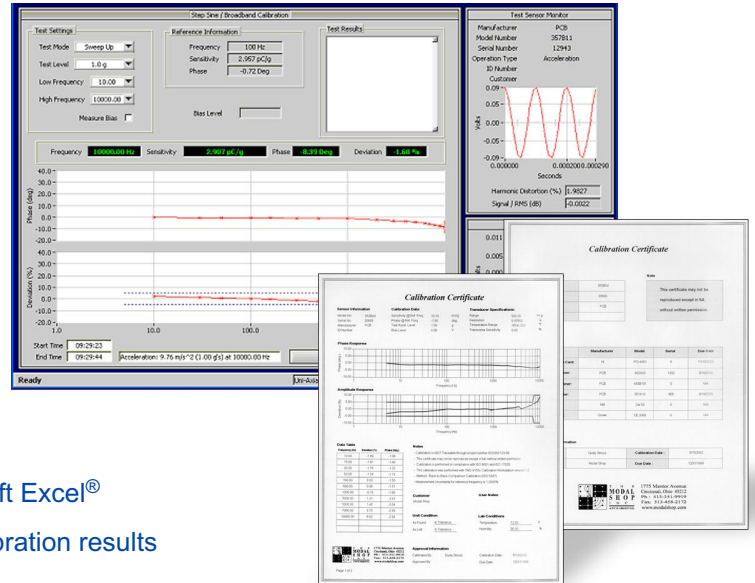

## K9145D10 SPECIFICATIONS:

Frequency Range	7 Hz - 10 kHz
Typical Measurement Uncertainty <sup>1</sup>	3% (7 Hz - 2 kHz) 1 dB (2 kHz - 10 kHz)
Calibration Method	Back-to-back comparison per ISO 16063-21 (2003)
Measurements	Sensitivity, Amplitude, Phase
Accelerometers Supported	ICP®, Charge, Voltage, Capacitive <sup>2</sup> , Piezoresistive <sup>2</sup> , CVLD <sup>2</sup>
Sensors Supported	Acceleration, Velocity
Excitation Type	Stepped Sine, Multi-sine
Acceleration Levels	1 to 10 g pk (9.8 to 98 m/s <sup>2</sup> pk)
Calibration Data Management	Yes
Automatic Pass/Fail Classification	Yes
Measurement Units	English, Metric
Main Voltage Supply	Universal, 100-240 V, 50/60 Hz
On-Site Installation and Training <sup>3</sup>	Included
Number of Frequency Points Supported	200
Test Reference Frequency	User-Definable

<sup>1</sup> Uncertainty valid for sensors with mass of less than 50 grams (1.75 oz) and sensitivity of 1 mV/g or greater

<sup>2</sup> Requires additional signal conditioners

<sup>3</sup> Excludes travel and living expenses outside the United States

## SUPPLIED ACCESSORIES:

Laptop controller  
9155 Calibration software  
9110D portable vibration calibrator

Data acquisition hardware  
Database software  
In-line charge amplifier

System verification sensor  
Various mounting adaptors and cables  
Manuals and Documentation



**The Modal Shop** 3149 E Kemper Road, Cincinnati, OH 45241 USA  
Toll free 800-860-4867 / Phone 513-351-9919 / Fax 513-458-2172  
E-mail [info@modalshop.com](mailto:info@modalshop.com) Web site [www.modalshop.com](http://www.modalshop.com)

© 2014 PCB Group, Inc. In the interest of constant product improvement, specifications are subject to change without notice.

PCB and ICP are registered trademarks of PCB Group, Inc. All other trademarks belong to their respective holders.

Windows and Excel are registered trademarks of Microsoft Corporation.

